




SPECIFICATIONS

Cartridge Diameter	6" (152mm)
Cartridge Length	20", 40", 60"
Rated Flow Rate (USgpm)	175, 350, 500
Filtration Media	Polypropylene Glass Fiber w/ Polyester Polyester
Maximum Service Temperature	Polypropylene – 82°C Glass Fiber w/ Polyester – 120°C
Support Material	Polypropylene Polyester / Nylon Stainless Steel
End Caps	Glass Filled Polypropylene Glass Filled Acetal
O-Ring Material	EPDM FKM BUNA-N Neoprene
Micron Ratings (µm)	1, 2, 5, 10, 20, 40, 70, 90
Retention Ratings	β_{5000} (99.98%)
Maximum Differential Pressure	2.5 – 3.0 barg Changeout Pressure
Flow Direction	In to Out



Typical multi-cartridge bundle
19 x 40" long, 36" N.B. – 6,650 USgpm capacity

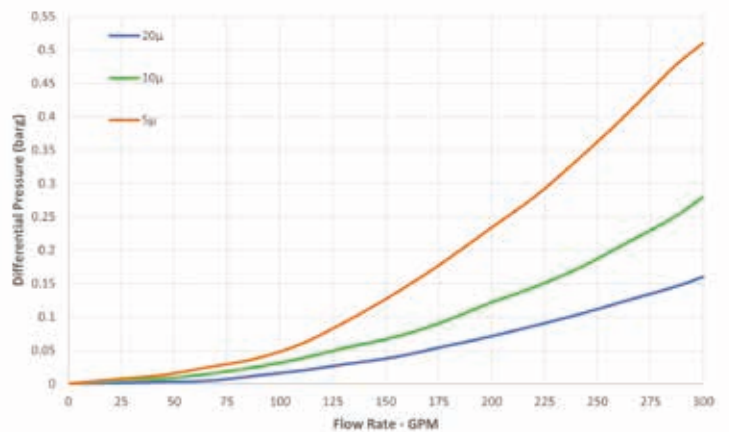

Flow vs DP curve: 40" long cartridge – 73mm orifice

EUROPE

Killarney, Ireland
Newbury, UK

P: +353 64 6633322
P: +44 1635 42363

ASIA PACIFIC

Jaipur, India

P: +91 141 239 8154

www.celerosft.com

MIDDLE EAST

Dubai, U.A.E.

P: +971 4 5289 555

US/CANADA

Houston, TX

P: +1 800 344 2611

CELEROS™
FLOW TECHNOLOGY

| SPEED | EXCELLENCE | PARTNERSHIP

Celeros Flow Technology reserves the right to incorporate our latest design and material changes without notice or obligations. Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing. Please contact your local sales representative for product availability in your region. For more information visit www.celerosft.com.

FL High-Capacity-Filtration_1031_DS_A4_V6_Issued 04/21 COPYRIGHT © 2021 Celeros Flow Technology, DL 537_03_HIG-CAP-FIL_GB
Hidrafilter, S.L. Parque Ind. Europolis - C/ Praga, 12 - 28232 Las Rozas (Madrid) Tel. 91 636 0097 Fax 91 636 1894 e-mail hidrafilter@hidrafilter.com