

DESIGN DATA

Cast Iron BS 1452 GR 220			Cast Steel ASTM A216 WCB		
Flange Rating	Design Pressure	Working Temp	Flange Rating	Design Pressure	Working Temp
ANSI 250 FF	10.3 BARG (150 PSIG) @ 38°C	0°C - 100°C	ANSI 300 RF	20 BARG (300 PSIG) @ 38°C	0°C - 100°C


STANDARD INTERNALS

Service	Materials				
	Valves	Shafts	Valve Seats	Drive Nuts	Basket
OIL	CAST IRON BS1452 ~ 260	MILD STEEL BS970 ~ 070M20	CAST IRON BS1452 ~ 260	CAST IRON BS1452 ~ 260	MILD STEEL BS970 ~ 070M20 OR STAINLESS STEEL AISI 316L
FRESH WATER	CAST IRON BS1452 ~ 260	STAINLESS STEEL BS970 ~ 316S16	CAST IRON BS1452 ~ 260	CAST IRON BS1452 ~ 260	STAINLESS STEEL AISI 316L
SEA WATER	GUNMETAL BS1400LG4	STAINLESS STEEL BS970 ~ 316S16	GUNMETAL BS1400LG4	GUNMETAL BS1400LG4	STAINLESS STEEL AISI 316L OR MONEL 400

DIMENSIONS

Size		Model No.	No. of Baskets	A mm	B mm	C mm	D mm	E mm	F mm	Gross Basket Area (per Chamber) cm ²	Weight	
in	mm										lb	kg
8	200	HN-8	2	1000	419	902	238	568	692	3225	2756	1250
10	250	HS-10	2	1089	610	1112	447	606	738	5160	3086	1400
10	250	HL-10	4	1502	457	1067	451	619	838	7485	4960	2250
12	300	HN-12	4	1502	457	1067	451	619	838	7485	4960	2250
14	350	HS-14	4	1502	457	1067	451	619	838	7485	4960	2250
14	350	HL-14	4	1743	781	1473	769	762	1067	12905	10384	4710
16	400	HN-16	4	1743	781	1473	769	762	1067	12905	10384	4710
18	450	HN-18	4	1743	781	1473	769	762	1067	12905	10384	4710
20	500	HS-20	4	1743	781	1473	769	762	1067	12905	10384	4710
20	500	HL-20	8	2410	870	1635	830	1240	1565	25805	19621	8900
24	600	HS-24	8	2410	870	1635	830	1240	1565	25805	19621	8900
24	600	HL-24	12	2600	870	1700	1220	1525	1800	38710	20657	9370
28	700	HN-28	12	2600	870	1700	1220	1525	1800	38710	20657	9370
30	750	HN-30	12	2600	870	1700	1220	1525	1800	38710	20657	9370
32	800	HN-32	12	2600	870	1700	1220	1525	1800	38710	20657	9370

Approximate dimensions only. Tolerance: Plus or Minus 3 mm

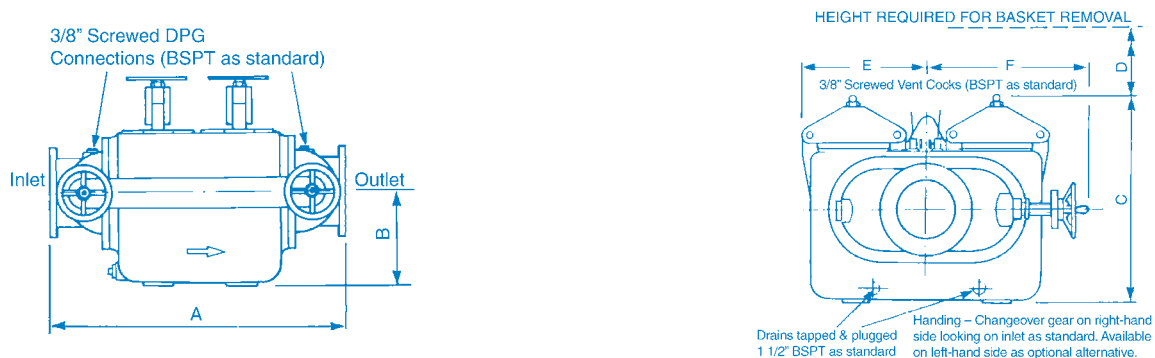

P: +44 1635 42363
F: +44 1635 49758
E: plentyfilters@celerosft.com

CELEROS™
FLOW TECHNOLOGY

| SPEED | EXCELLENCE | PARTNERSHIP